

Interactive Display
SUNMI

Flexibility for endless options.
FLEX 3

Powered by
SUNMI OS

Compatible with
SUNMI DMP

Google
Mobile
Services

Crafted with Precision, Designed for Simplicity

Stunning Bezel-Less Display

1920x1080 FHD

Brings details to life on the screen.

400 Nits Brightness

Vivid colors that stand out even in bright light.

Anti-Fingerprint Coating

Touch-resistant surface, keeping the screen smooth.



16mm Narrow Bezel

Expanded screen space for a broader view.

17mm

Slim Profile

*15.6" at 250 nits.
Contact sales for full specs.

Dual-Layer Back and Flat Design



Powerful Computing for Outstanding Performance

**Qualcomm
Octa-Core**
CPU

2.7GHz

Max. Clock Speed



6nm

Manufacturing Process

**8GB RAM +
256GB ROM**

Max. Memory & Storage

The integrated AI accelerator architecture provides up to 13 TOPS of computing power.



**AI-Powered
Voice Interaction**



**AI-Powered
Facial Recognition**



**AI-Powered
Loss Prevention**


*15.6" model: Qualcomm 6-core CPU, up to 2.4GHz.

Flexible Combinations for Every Need


Designed to meet diverse business scenarios.




Recommend combination

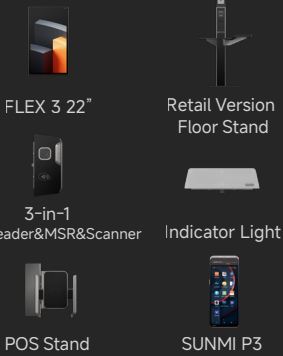

Recommend combination

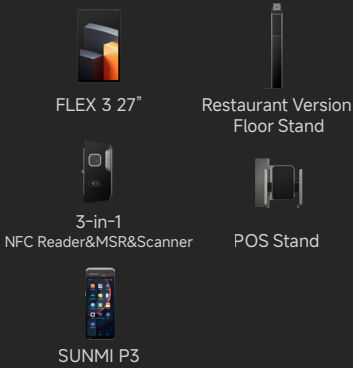


Recommend combination



Recommend combination



Corporate Visitor Registration

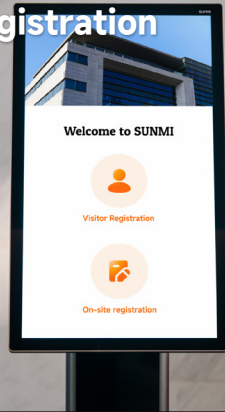

Recommend combination




FLEX 3 27"



Restaurant Version
Floor Stand

Smart Healthcare

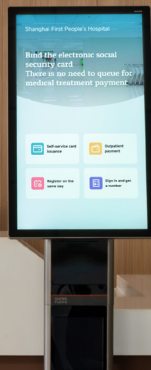

Recommend combination



FLEX 3 27"



Restaurant Version
Floor Stand



3-in-1
NFC Reader&MSR&Scanner

Electronic Class Boards



Recommend combination



FLEX 3 22"



*100x100mm VESA
(From third-party brands)

Personalized customization to meet the diverse brand needs.



Customizable Decorative Strip



Customizable Floor-Standing
Light Box



Customizable KT Board

Four Sizes Interactive Display



FLEX 3 15.6"



FLEX 3 18.5"



FLEX 3 22"



FLEX 3 27"


14 Types of Stands and Functional Accessories

Functional Accessories


Stands




Indicator Light



POS Stand



3-in-1
NFC Reader & MSR
& Scanner



Camera
Options include Monocular,
Binocular, or 3D Cameras



Retail Version
Floor Stand



Retail Version
Desktop Stand



Restaurant
Version
Floor Stand



Restaurant
Version
Desktop Stand



Lite
Desktop Stand



Lite
Floor Stand



Lite
Desktop Stand
(L-Shaped)

*Retail version floor stand and desktop stand are only compatible with 22" interactive display.

SUNMI FLEX 3 SPEC

OS SUNMI OS 4.0 (Based on Android 13)	Memory High Version: 6GB RAM+128GB ROM Standard Version: 4GB RAM+64GB ROM	GMS Supported	NFC Tap on screen	Card Slots 1*MicroSD
Network LAN 1000M	Wi-Fi High Version: 6GHz/5GHz/2.4GHz, IEEE 802.11 a/b/g/n/ac/ax Standard Version: 5GHz/2.4GHz, IEEE 802.11 a/b/g/n/ac	Bluetooth High Version: Bluetooth 5.2, Support BLE BT Long Range (farthest distance 200m) supported Standard Version: Bluetooth 5.0, Support BLE	Protection IP54	Accessories (Optional) Indicator Light / NFC&MSR&Scanner / Monocular / Binocular / 3D Camera / POE / POS Bracket / Stand (Option: Printer, Scanner) / VESA 100*100

	FLEX 3 15.6"	FLEX 3 18.5"	FLEX 3 22"	FLEX 3 27"
Product Model	P851A	F9J1A/F9J2A	F961A/F962A	F9E1A/F9E2A
CPU	Qualcomm Hexa-core, up to 2.4GHz High Version: Qualcomm octa-core, up to 2.7GHz Standard Version: Qualcomm octa-core, up to 2.4GHz			
Displays	15.6" FHD, 1920*1080, 250 nits Capacitive Multi-touch Screen, Anti-fingerprint Coating	18.5" FHD, 1920*1080, IPS, 400 nits Capacitive Multi-touch Screen, Anti-fingerprint Coating	21.5" FHD, 1920*1080, IPS, 400 nits Capacitive Multi-touch Screen, Anti-fingerprint Coating	27" FHD, 1920*1080, IPS, 400 nits Capacitive Multi-touch Screen, Anti-fingerprint Coating
Button	1*Power button	1*Power button (Fingerprint ID)	1*Power button (Fingerprint ID)	1*Power button (Fingerprint ID)
Ports	4*USB 2.0 Type A/1*RJ45 (Gigabit Ethernet)/1*RJ11/1*RJ12/1*Type-C Debug port/1*Audio Jack/2*Micro USB	2*USB 2.0 Type-A/4*Micro USB/1*Type-C Debug port/1*Type-C Power port/2*RJ45 (Gigabit Ethernet)/1*POE port/1*R5485/R5232/1*Audio Jack		
Audio	1*3W Speaker 1*Microphone	2*3W Speaker 2*Microphone	2*3W Speaker 2*Microphone	2*3W Speaker 2*Microphone
Net Weight	2.2 kg	2.7kg	3.3kg	6.6kg
Dimensions	375.05*224.5*31.3 mm	443*264*29.8 mm	511*303*29.8 mm	646*384*29.8 mm
Environment	Operating Temperature: -10°C~50°C Storage Temperature: -20°C~60°C	Operating Temperature: 0°C~40°C Storage Temperature: -20°C~60°C	Operating Temperature: 0°C~40°C Storage Temperature: -20°C~60°C	Operating Temperature: 0°C~40°C Storage Temperature: -20°C~60°C
Adapter	Input: 100~240V AC Output: 24V/1.5A	Input: 100 ~ 240V AC Output: 20V/3.5A	Input: 100 ~ 240V AC Output: 20V/3.5A	Input: 100 ~ 240V AC Output: 20V/3.5A
Certifications	CCC, CE, FCC, RoHS, SRRC, CB	3C, SRRC, CE, CB, FCC, IC, RoHS / REACH / WEEE, EAA, EMV CL L1	3C, SRRC, CE, CB, FCC, IC, RoHS / REACH / WEEE, EAA, EMV CL L1	3C, SRRC, CE, CB, FCC, IC, RoHS / REACH / WEEE, EAA, EMV CL L1